


Features:


- Visible Light Facial Recognition
- Anti-spoofing algorithm against print attack (laser, color and B/W photos), videos attack and 3D mask attack
- Multiple Verifications: Face / Fingerprint / Card / Password
- Multiple card modules: 125KHz ID card (EM) / 13.56MHz IC card (MF)
- Supplement light with adjustable brightness
- 6,000 face templates capacity

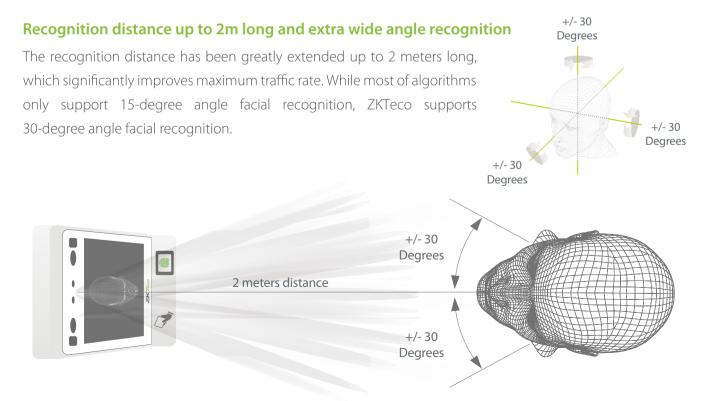

Specifications:

Display	5-inch Touch Screen
Face Capacity	6,000
Fingerprint Capacity	6,000 (Optional 10,000)
Card Capacity	10,000
Transactions	200,000
Operation System	Linux
Standard Functions	ID Card, ADMS, T9 Input, DST, Camera, 9-digit User ID, Acess Levels, Groups, Holidays, Anti-passback, Record Query, Tamper Switch Alarm, Multiple Verify Modes.
Hardware	900MHz Dual Core CPU Memory 512MB RAM / 8G Flash 2MP WDR Low Light Camera Adjustable Light Brightness LED
Communication	TCP/IP, WiFi, Wiegand input / output, RS485
Access Control Interface	3rd Party Electric Lock, Door Sensor, Exit Button, Alarm output, Auxiliary Input
Optional Function	13.56MHz IC Card (MF)
Facial Recongntion Speed	≤1s
Biometrics Algorithms	ZKFace V5.8 & ZKFinger V10.0
Power Supply	12V 3A
Working Humidity	20%-80%
Working Temperature	0°C ~ 45°C (32°F ~ 113°F)
Dimensions (W*H*D)	91.93*202.93*21.5mm
Supported Softwares	ZKBioAccess IVS

Configuration:

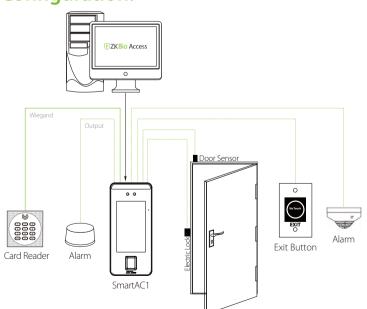

Optional Accessories






RS485 RFID Reader Fingerprint Reader

Exit Button





Electric Lock

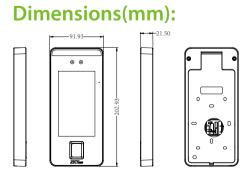







V1.0 05/09/2023