

P160 Palm Recognition

Multi-Biometric T&A Terminal with Access Control Functions



P160 is a multi-biometric identification time & attendance and access control terminal, which can connect with third party electric lock, door sensor, and exit button etc.

With the latest palm/fingerprint identification algorithm and streamlined technology, it can hold 1,000 palm templates and up to 3,000 fingerprint templates without dividing into groups.

Communicating via Wi-Fi, TCP/IP, and USB host, it ensures a smooth connection and data transfer. Amazing verification speed and intuitive operation process make it popular. Elaborately designed and finely processed, it matches your slap-up office perfectly.




Features

- 1,000 Palms, 3,000 Fingerprints, 10,000 cards and 5,00,000 records.
- Professional ZKTeco Palm and fingerprints identification algorithm.
- Elegant ergonomic design.
- TCP/IP, USB-Host and Wi-Fi communication
- Verification speed less than 1 second.
- POE module / 3G module / 4G module / High (general) level access control module / Battery module/ Printer
- Easy installation.

Specifications

| | |
|-----------------------|--|
| Display | 2.8-inch TFT Color Display |
| Palm Capacity | 600 |
| Fingerprint Capacity | 3,000 |
| Card Capacity | 10,000 |
| Logs Capacity | 100,000 |
| Communication | TCP/IP, USB-Host, Wi-Fi (Optional) |
| Standard Functions | Automatic Status Switch, Self-Service Query, Work Code, T9 Input, 9 Digit User ID, DST, Scheduled-bell,SMS,RS232 Printer AC module 1:Exit Button, Door Lock, Alarm,12V OUT,AUX IN |
| Optional Function | ID Card, IC Card POE, 3G/4G, Battery Module, ADMS AC module 2: Exit Button, Door Lock, Alarm,12V OUT, AUX IN, Door Sensor, RS485, Wiegand IN/OUT. |
| Power Supply | 12V 1.5A |
| Verification Speed | ≤1 sec |
| Operating Temperature | 0 - 45 °C |
| Operating Humidity | 20% - 80% |
| Dimensions | 179.95 x 134.94 x 38.5 mm |

Dimensions

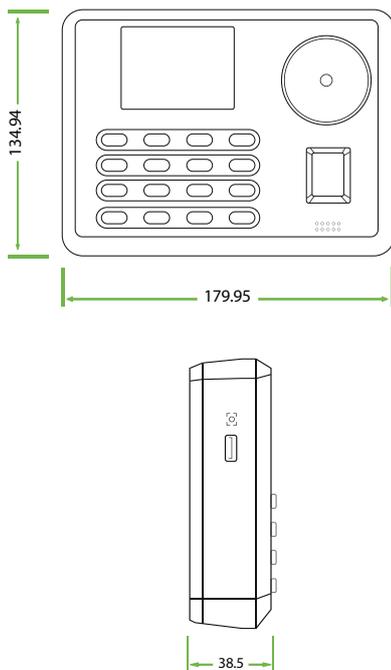

Configuration

