

DS-2CV1023G2-LIDW(F)(B)

Cámara IP de red tipo bala fija Wi-Fi para exteriores de 2 MP



- Compatible con Wi-Fi 6
- Buen rendimiento nocturno con hasta 30 m de infrarrojos y 30 m de luz blanca
- Micrófono y altavoz integrados, admite audio bidireccional
- Apoyar la detección de personas y vehículos
- Resistente al agua y al polvo (IP66)

▪ Especificaciones

Camara	
Sensor Imagen	1/3" Progressive Scan CMOS
Max. Resolucion	1920 × 1080
Min. Iluminacion	Color: 0.01 Lux @ (F2.0, AGC ON), B/W: 0 Lux with IR
Tiempo obturacón	1/3 s to 1/100,000 s
Day & Night	IR cut filter
Ajuste angulo	Pan: 0° to 360°, tilt: 0° to 90°, rotate: 0° to 360°
Lentess	
Tipo Lente	Lente focal fija, 2,8, 4 y 6 mm opcional
Distancia focal & FOV	2.8 mm, horizontal FOV 101°, vertical FOV 56°, diagonal FOV 118° 4 mm, horizontal FOV 78°, vertical FOV 42°, diagonal FOV 92° 6 mm, horizontal FOV 49°, vertical FOV 28°, diagonal FOV 56°
Apertura	F2.0
Tipo Iris	Fixed
Montura Lente	M12
Profundidad de campo	2.8 mm: 0.8 m~∞ 4 mm: 1.1 m~∞ 6 mm: 2.3 m~∞
DORI	
DORI	2.8 mm, D: 43 m, O: 17 m, R: 8 m, I: 4 m 4 mm, D: 59 m, O: 23 m, R: 11 m, I: 5 m 6 mm, D: 86 m, O: 34 m, R: 17 m, I: 8 m
Iluminador	
Tipo de luz suplementaria	IR, White Light
Longitud de onda IR	850 nm
Gama de luces suplementarias	Hasta 30 m
Luz suplementaria inteligente	Si
Video	
Main Stream	50 Hz: 25 fps (1920 × 1080, 1280 × 720, 768 × 432) 60 Hz: 30 fps (1920 × 1080, 1280 × 720, 768 × 432)
Sub-Stream	50 Hz: 25 fps (768 × 432) 60 Hz: 30 fps (768 × 432)
Video Compression	Main stream: H.265/H.264, Sub-stream: H.265/H.264/MJPEG
Video Bit Rate	32 Kbps to 8 Mbps
H.264 Type	Baseline Profile, Main Profile, High Profile
H.265 Type	Main Profile
Bit Rate Control	CBR, VBR
Region of Interest (ROI)	1 fixed region for main stream
Audio	
Audio Type	Mono sound
Audio Compression	G.711(ulaw)/ (AAC-LC)
Audio Bit Rate	64 Kbps (G.711ulaw)/16 to 64 Kbps (AAC-LC)
Audio Sampling Rate	8 kHz/16 kHz

Environment Noise Filtering	Yes
Red	
Seguridad	Password protection, complicated password, watermark, basic and digest authentication for HTTP, WSSE and digest authentication for Open Network Video Interface, security audit log, host authentication (MAC address)
Vista en vivo simultánea	Hasta 6 canales
API	ONVIF (Profile S, Profile G, Profile T), ISAPI, SDK
Protocolos	TCP/IP, ICMP, DHCP, DNS, HTTP, RTP, RTCP, RTSP, NTP, IGMP, IPv4, IPv6, UDP, QoS, UPnP
User/Host	Up to 32 users 3 user levels: administrator, operator, and user
Client	iVMS-4200, Hik-Connect
Web Browser	Local service: IE 11, Chrome 57.0+, Firefox 52.0+, Edge 89+
Wi-Fi	
Wi-Fi Protocol	IEEE802.11b, IEEE802.11g, IEEE802.11n
Frequency Range	2.4 GHz to 2.4835 GHz
Channel Bandwidth	20/40 MHz
Modulation	802.11n: QPSK, BPSK, 16QAM, 64QAM, 802.11b: CCK, QPSK, BPSK, 802.11g: QPSK, BPSK, 16QAM, 64QAM
Transfer Rate	11n: up to 300 Mbps
Imagen	
Wide Dynamic Range (WDR)	Digital WDR
SNR	≥ 52 dB
Day/Night Switch	Día, Noche, Automático, Horario
Mejora de la imagen	BLC, HLC, 3D DNR
Configuración de imagen	Saturación, brillo, contraste, nitidez, ganancia, balance de blancos, ajustable mediante software cliente o navegador web
Máscara de privacidad	4 programmable polygon privacy masks
Interface	
Micrófono incorporado	Yes
Reset Key	Yes
Ethernet Interface	1 RJ45 10 M/100 M self-adaptive Ethernet port
Eventos	
Evento Basico	Detección de movimiento (admite activación de alarma por tipos de objetivos específicos (humanos y vehículos)), excepción
Enlace	Notificar al centro de vigilancia, enviar correo electrónico, activar grabación, activar captura, activación audíto
General	
Power	12 VCC ± 25%, 0,55 A, máx. Enchufe de alimentación coaxial de 6,5 W, Ø5,5 mm, protección contra polaridad inversa. *Se incluye un adaptador de conmutación en el paquete.
Material	Plastico
Dimensiones	260.9 mm × 113.9 mm × 67.4 mm (10.3" × 4.5" × 2.7")
Dimension paquete	300 mm × 130 mm × 100 mm (10.2" × 5.1" × 4.9")
Peso	Approx. 310 g (0.68 lb.)
Peso con paquete	Approx. 550 g (1.12 lb.)
Condiciones almacenamiento	-30 °C to 60 °C (-22 °F to 140 °F). Humidity 95% or less (non-condensing)

Condiciones de inicio y funcionamiento	-30 °C to 60 °C (-22 °F to 140 °F). Humidity 95% or less (non-condensing)
Language	English, Ukrainian
Funciones generales	Heartbeat, anti-banding, mirror, password protection
Approvaciones	
EMC	CE-EMC: EN 55032: 2015, EN 61000-3-2:2019, EN 61000-3-3: 2013+A1:2019, EN 50130-4: 2011 +A1: 2014
RF	CE-RED: EN 301489-1 V2.1.1(BT or 2.4G); EN 301489-17 V3.1.1 (BT or 2.4G); EN 300328 V2.1.1 (BT or 2.4G); EN 62311:2008 (BT or 2.4G)
Safety	CB: IEC 62368-1: 2014+A11, CE-LVD: EN 62368-1: 2014/A11: 2017
Environment	CE-RoHS: 2011/65/EU, WEEE: 2012/19/EU, Reach: Regulation (EC) No 1907/2006
Protection	IP66: IEC 60529-2013

Aplicación típica

Hikvision products are classified into three levels according to their anti-corrosion performance. Refer to the following description to choose for your using environment.

This model has NO SPECIFIC PROTECTION.

Level	Description
Top-level protection	Hikvision products at this level are equipped for use in areas where professional anti-corrosion protection is a must. Typical application scenarios include coastlines, docks, chemical plants, and more.
Moderate protection	Hikvision products at this level are equipped for use in areas with moderate anti-corrosion demands. Typical application scenarios include coastal areas about 2 kilometers (1.24 miles) away from coastlines, as well as areas affected by acid rain.
No specific protection	Hikvision products at this level are equipped for use in areas where no specific anti-corrosion protection is needed.


▪ Modelo disponible

DS-2CV1023G2-LIDWF(2.8mm)(B)

DS-2CV1023G2-LIDWF(4mm)(B)

DS-2CV1023G2-LIDWF(6mm)(B)

▪ Dimensiones

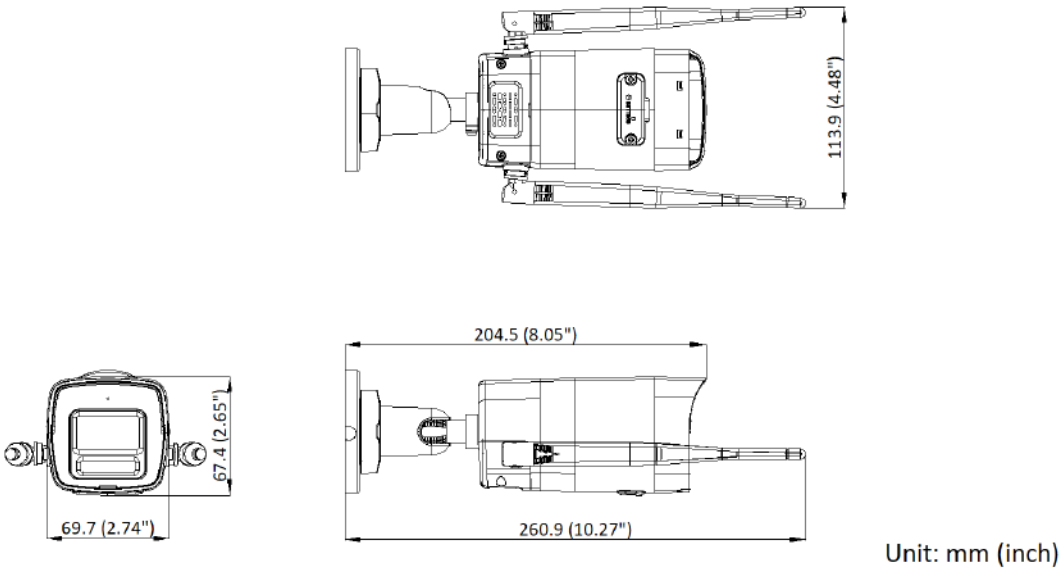

▪ Accesorios

▪ Opcional

DS-1275ZJ-SUS Vertical pole mount	DS-1276ZJ-SUS Corner mount	DS-1280ZJ-XS Junction box
		
		



Rosario Seguridad
Av Pte Peron 3998
Pellegrini 4820
+54 9 341 6591429

